


Empowering Your Solar Solutions



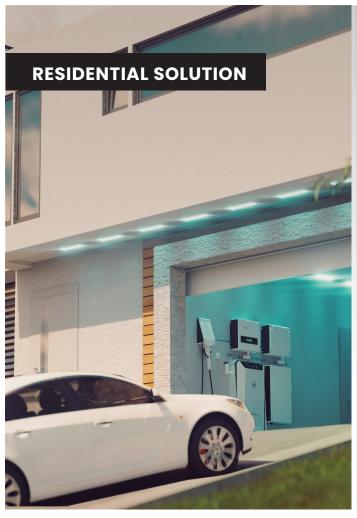

Rack Mounted LV Battery System

RESIDENTIAL FNFRGY STORAGE SOLUTION

Modular Design and Easy Installation: EBrick's rackmount design allows for customizable and simple installation, with the flexibility to connect multiple units in parallel. This reduces installation time and costs.

Wi-Fi Connectivity and App Control: EBrick features Wi-Fi connectivity, enabling users to remotely monitor and control the system via a dedicated app. This enhances user experience with real-time monitoring and efficient system management.

Stable LiFePO4 Battery Technology: EBrick uses reliable lithium iron phosphate (LiFePO4) batteries, offering up to 8000 cycles. Its efficient battery management system ensures high performance and safety.











RACK MOUNTED LV BATTERY SYSTEM

Technical Specifications

Spitzer Energy Residential Storage Solution

Battery Energy Storage	
Battery Chemistry	LiFePO4
Cell Capacity (Ah)	100
Nominal Energy (kWh)	5.12
Output Power (kW)	4.8
Default Voltage (V)	51.2
Voltage Range (V)	43.2 ~ 59.2
Max. Operation Current (A)	95
Primary Overcurrent Protection (A)	98@10S
Secondary Overcurrent Protection (A)	120@30mS
Max. Charging Voltage (V)	58.4
Discharge Cut-off (V)	43.2
Recommended Charging Voltage (V)	56.8
Dimension (W*D*H)	440*420*132mm 17.3*16.5*5.2in
Net Weight (Approximate)	45kg 99.2lb


General Parameters	
Max. 31 systems in parallel	
–20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%	
Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C	
Natural Cooling	
2000m / 6561ft	
8000 Cycles	
RS485, CAN, WiFi	
R-EB005161	
UL1973, UL9540A, IEC 62619, UN 38.3 CEI 0-21, UKCA, EN-61000, EN-62311	
Rack Mounting	
Indoor	
IP20	
10 Years	


[1] Please refer to the warranty letter for details





Product Details

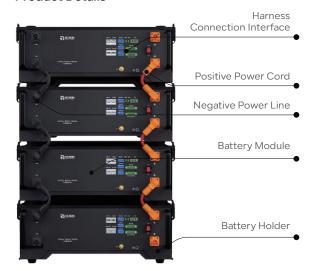

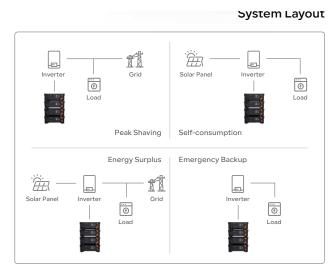

Application Scenario





